




RATNAPARKHI

ELECTRONICS IND. PVT. LTD.
SINCE 1989

We Support



PEDM Broken Drill Cum Tap Remover

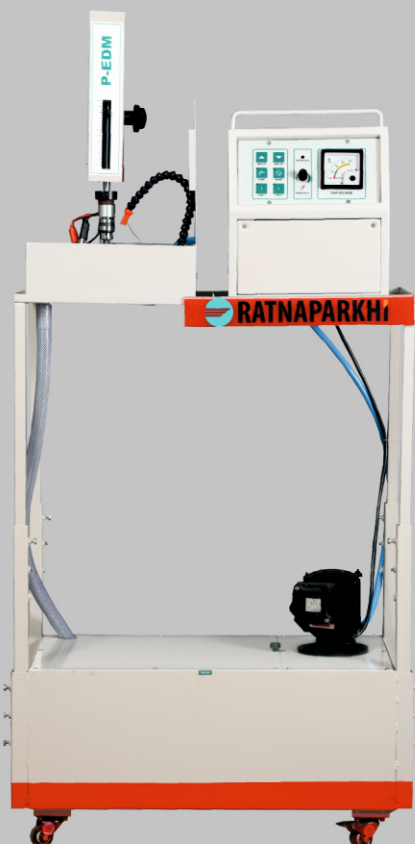

Main Features

- ⤴ Portable, Simple, Economical
- ⤴ Removes broken drills, taps, screws using appropriate circular / flat Electrode.
- ⤴ Angular drilling possible.
- ⤴ High Pressure pump to flush debris.
- ⤴ Magnetic stand for easy mounting.
- ⤴ Spark off after reaching depth.
- ⤴ Spark off for interlocks.
- ⤴ Auto retrace during gap-short.
- ⤴ Power Supply 230VAC, 50Hz
- ⤴ Connected Load 500 Watt.
- ⤴ Max Z travel 90 mm.
- ⤴ Electrode Diameter $\varnothing$ 1 ~ 6 mm.

Technical Specifications :

Input Power supply	230VAC ($\pm$ 10%) 50 Hz, 5 A
Connected Load	500Watt. (Optional 1000 Watt.)
Gap Open Voltage	145 VDC $\pm$ 10 %
Generator Dimension (L x W x H)	350 x 258 x 310 mm.
Generator Weight	18 Kg.
Z-Travel Max	90 mm.
Electrode	Circular / Flat. (Brass / Cu) Hollow brass tube for through flushing

Application examples for removing broken Taps and screws using appropriate circular / flat Electrode




Hollow Copper Tube



Solid Brass Rod



Solid Copper Strips

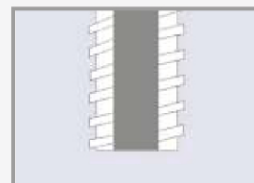

Solid Copper Rod

Important Note : In keeping with our constant endeavour to meet market needs, we reserve the right to alter or change the specifications mentioned, without prior notice

www.ratnaparkhiedm.com



RATNAPARKHI
ELECTRONICS IND. PVT. LTD.
SINCE 1989

E-52, MIDC, Satpur,
Nashik, Maharashtra
India - 422007

Contact :
Tel. : +91- 253-2351125
Fax : +91- 253-2351025

E- Mail :
sales@ratnaparkhiedm.com

Our Sales & Services Network : Delhi, Faridabad, Ludhiana, Bengaluru, Coimbatore, Chennai, Kolkata, Ahmedabad, Hyderabad, Mumbai, Pune.

Visit us



JUNE - 2025